


**Slimline Sliding Security
Door Screens G1000 Series**
**Type: One Sliding
Door on One Track**



(1 Panel)

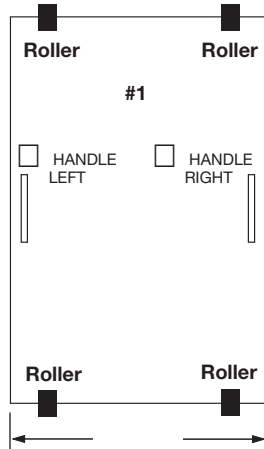

Sash Width Make Size

IMPORTANT:
OVERALL
FRAME
WIDTH NOT TO
EXCEED 2-1/2" FROM
MEASUREMENT (G)

IMPORTANT:
TO ENSURE PROPER
TENSION IN MESH,
WE RECOMMEND
MID-RAIL(S) FOR
DOOR OVER 90"
IN HEIGHT

Handle Height
measured from the
bottom of
mounting frame to
center of handle
pull. Thumb turn is
1-13/16"
below the centerline
of handle pull.

**ORDER FORM | ONE SLIDING DOOR ON ONE TRACK (SLIMLINE)
SURFACE MOUNT - NEW FRAME STYLE WITH MOUNTING FLANGE**

FORM M

VISTA ACCOUNT NUMBER _____
JOB NUMBER/NAME _____ P.O. NUMBER _____
COMPANY NAME _____
ADDRESS _____ CITY _____
STATE _____ ZIP CODE _____ TELEPHONE _____


COLOR OPTIONS:

WHITE
BLACK
BROWN
SAHARA BROWN
LIGHT GRAY
SILVER
ALMOND
BRONZE
SAHARA GRAY
ADOBE



**BRUSH BUG SEAL ONLY -
NO INTERLOCK**

13/16" x 96" BRUSH
1-3/16" x 96" BRUSH
1-9/16" x 96" BRUSH

GLASS DOOR HANDLE
HEIGHT (HIGHEST
POINT) FROM BOTTOM
OF DOOR

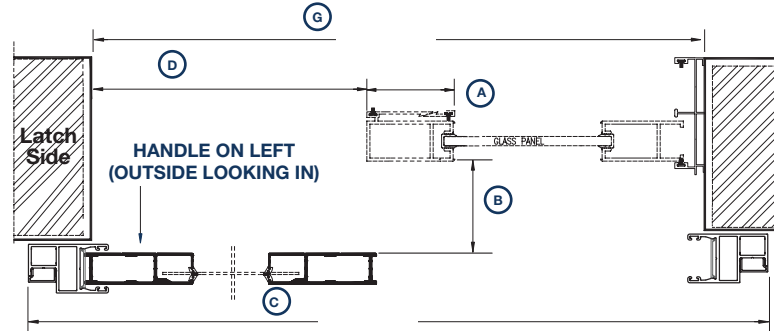

FIELD MEASUREMENTS

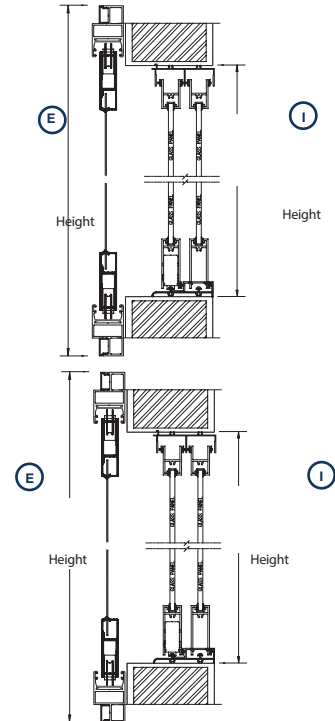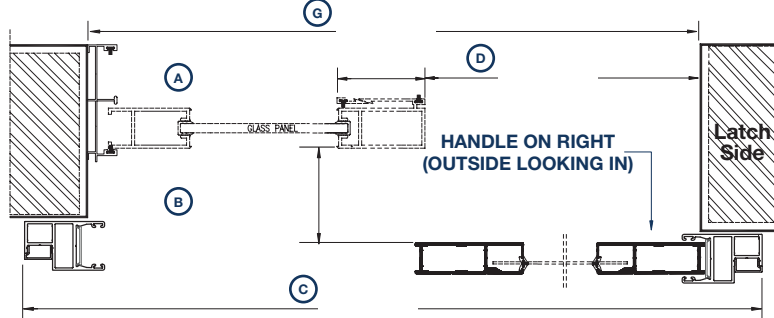

REQUIRED MEASUREMENTS (A-I)

DOORS VIEWED OUTSIDE LOOKING IN.

HANDLE: Left Right

VISTA SECURITY SCREEN HANDLE HEIGHT @
(Add 4" to the Highest Point of the Glass Door Handle)

DOOR SIZES LISTED ARE NET
(No Deductions Necessary)

SIZES LISTED NEED DEDUCTIONS
CUT 1 G50MA082 FINISH ANGLE @
CUT 1 G50MA082 FINISH ANGLES @



CUT 1-1X1X18 ANGLE @

CUT 1 G50MA155 INTERLOCK @



ROLLER ADJUSTMENT: Outside Inside

KEY ALIKE TO OTHER SLIDER FOR THIS JOB NAME

(H) CIRCLE INTERLOCK OPTION

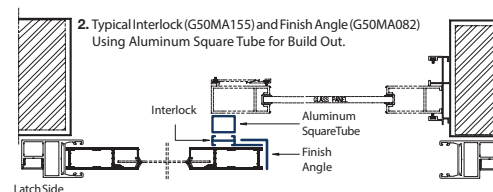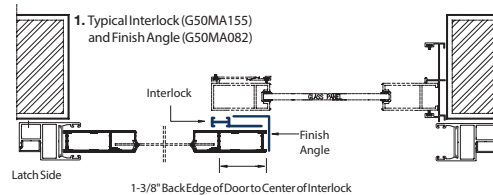

Doors are viewed outside looking in.

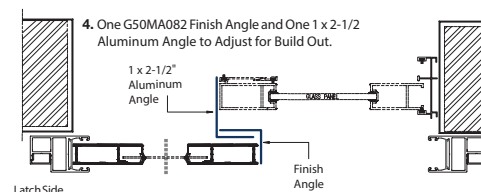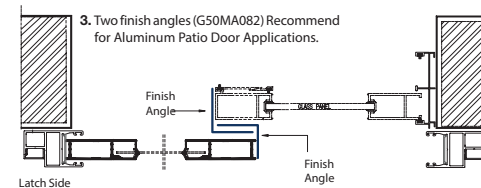

(C) Net Width

(E) Net Height